


DuraPort Flanged See-Through

Engineering Information:

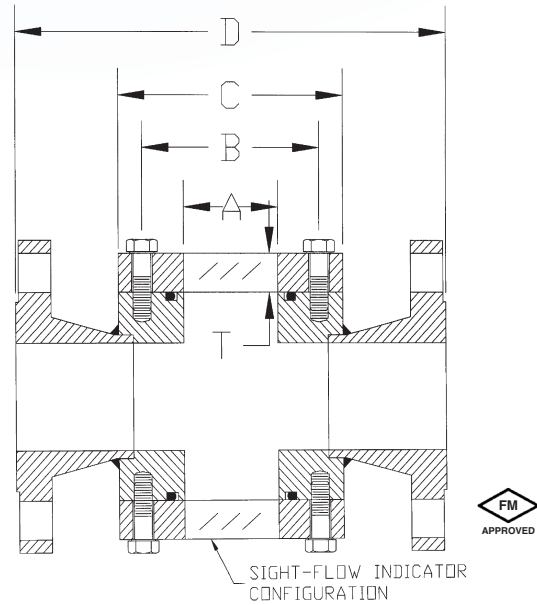

Borosilicate / Duplex 2205

150# SIZE	DIM A	DIM B	DIM C	DIM D	DIM T
2	2	3 3/4	4 3/4	9 1/8	11/16
3	3	4 3/4	5 3/4	10 1/8	11/16
4	4	6	7	11 3/8	11/16
6	5	8	9	13 3/8	15/16
8	6	10 1/2	12	16 1/8	15/16

300# SIZE	DIM A	DIM B	DIM C	DIM D	DIM T
2	2	3 3/4	4 3/4	9 5/8	11/16
3	3	4 3/4	5 3/4	11 9/16	11/16
4	4	6	7	12 1/8	11/16
6	5	8	9	14	15/16
8	6	10 1/2	12	16 3/4	15/16

Note: All dimensions in inches. Standard drillings are ANSI B16.5, other drillings such as DIN available upon request.

Connection Options: Weld Neck Flanges (Standard), Lap Joint Flanges / Stub Ends, Slip-On Flanges, Butt Weld, Socket Weld, Threaded, Sanitary

Flow Indicator Options: Flapper, Rotor, Drip-Tube