


# Model I Flange with Teflon® Insert

## Engineering Information:

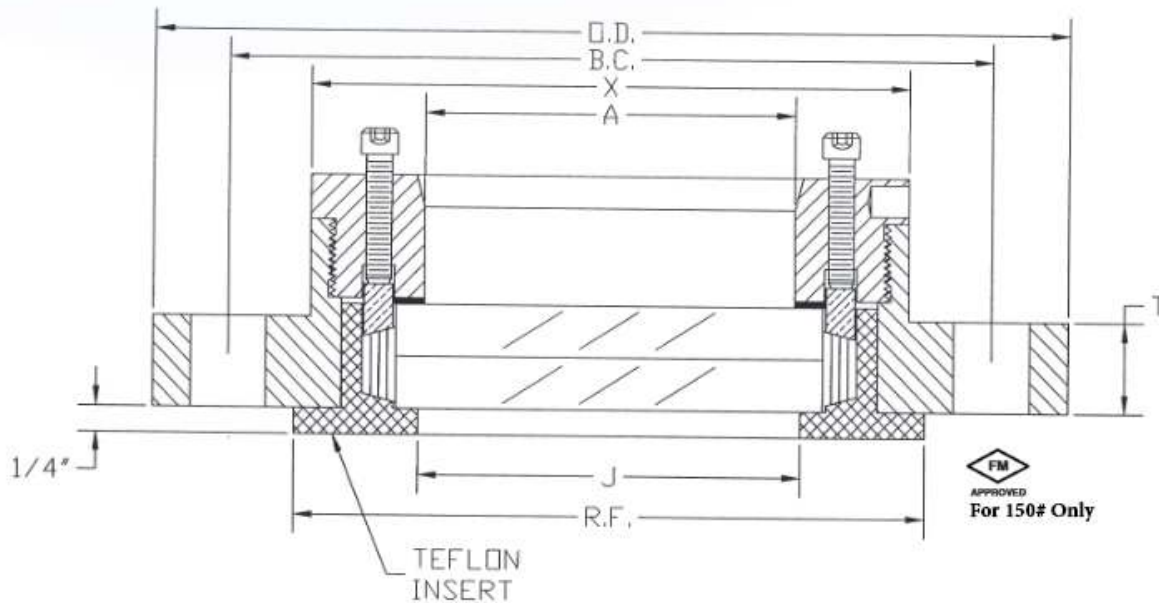

| Size<br>inches-pst | O.D.   | A     | T      | R.F.   | J       | X      | No. of<br>Bolt Holes | Diam. of<br>Bolt Holes | Diam. of<br>Bolt Circle |
|--------------------|--------|-------|--------|--------|---------|--------|----------------------|------------------------|-------------------------|
| 2-150              | 6      | 1 3/4 | 11/16  | 3 5/8  | 1 15/16 | 3 1/2  | 4                    | 3/4                    | 4 3/4                   |
| 2-300              | 6 1/2  | 1 3/4 | 13/16  | 3 5/8  | 1 15/16 | 3 5/8  | 8                    | 3/4                    | 5                       |
| 3-150              | 7 1/2  | 2 5/8 | 7/8    | 5      | 2 7/8   | 4 5/8  | 4                    | 3/4                    | 6                       |
| 3-300              | 8 1/4  | 2 5/8 | 1 1/16 | 5      | 2 7/8   | 4 5/8  | 8                    | 7/8                    | 6 5/8                   |
| 4-150              | 9      | 3 5/8 | 7/8    | 6 3/16 | 3 3/4   | 5 7/8  | 8                    | 3/4                    | 7 1/2                   |
| 4-300              | 10     | 3 5/8 | 1 3/16 | 6 3/16 | 3 3/4   | 6      | 8                    | 7/8                    | 7 7/8                   |
| 6-150              | 11     | 5 1/2 | 15/16  | 8 1/2  | 5 3/4   | 8      | 8                    | 7/8                    | 9 1/2                   |
| 6-300              | 12 1/2 | 5 1/2 | 1 3/8  | 8 1/2  | 5 3/4   | 8 3/8  | 12                   | 7/8                    | 10 5/8                  |
| 8-150              | 13 1/2 | 7 3/8 | 1 1/16 | 10 5/8 | 7 11/16 | 10 1/4 | 8                    | 7/8                    | 11 3/4                  |
| 8-300              | 15     | 7 3/8 | 1 9/16 | 10 5/8 | 7 11/16 | 10 1/4 | 12                   | 1                      | 13                      |

Note: Applications requiring DIN standards or non-ANSI flanges are available upon request.

- No mating gasket required.